

## Applications

- Broadcast and Narrowcast Networks
- Long Distances
- High Optical Splits

## Features

- DOCSIS 3.1 Compliant
- OC-48 Pinout Compatible
- Telecordia<sup>®</sup> Technologies 468 Compliant
- 78 Channel Count
- Optical Output Power Up to 31 mW
- Wide Temperature Range – Stable Even in Harsh Environments

The 1616A 1310 nm DOCSIS 3.1 DFB laser module is designed for both broadcast and narrowcast analog applications. The 1616A laser module is compliant with the new DOCSIS 3.1 standard, supporting operational bandwidth up to 1.2 GHz.

This highly linear, OC-48 pinout compatible device features Ortel's advanced analog chip design. It has optical output power options up to 31 mW with superior distortion performance over an enhanced temperature range of -40°C to +85°C.

## Performance Highlights

Parameter	Min	Typical	Max	Units
Wavelength	1300	-	1320	nm
Optical Output Power (multiple versions)	4-31	-	-	mW
Temperature Range	-40	-	+85	°C
Frequency Range	5	-	1200	MHz
Carrier to Noise Ratio	51	-	-	dB
Composite Second Order (multiple versions)	55-60	-	-	dB
Composite Triple Beat	65	-	-	dB

## Absolute Maximum Ratings

Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. These are absolute stress ratings only. Functional operation of the device is not implied at these or any other conditions in excess of those given in the operational sections of the data sheet. Exposure to absolute maximum ratings for extended periods can adversely affect device reliability.

Parameter	Symbol	Condition	Min	Max	Unit
Operating Temperature Range	$T_C$	Continuous	-40	+85	°C
Storage Temperature Range	$T_{STG}$	-	-40	+85	°C
Laser Forward dc Current	-	-	-	150	mA
Photodiode Reverse Voltage	$V_{RPD}$	-	-	10	V
Laser Reverse Voltage, dc	-	-	-	1	V
ESD	-	HBM: R = 1500 Ohm, C = 100pF	-500	500	V
TEC Current	$I_{TEC}$	Continuous	-1.9	1.9	A

## Electrical/Optical Characteristics

Laser Temperature (TL) = 25°C,  $I_F=I_{OP}$ , Beginning of Life (BOL)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Wavelength	-	-	1300	-	1320	nm
Optical Output Power	-	1616-xxxx-04 version See ordering page for options 1616-xxxx-31 version	4 31	-	-	mW mW
Optical Isolation	ISO	-	30	-	-	dB
Optical Return Loss	ORL	$T_C$	40	-	-	dB
Sidemode Suppression Ratio	SMSR	-	35	-	-	dB
Threshold Current	$I_{TH}$	-	-	-	20	mA
Operating Current	$I_{OP}$	varies with power option	-	-	120	mA
Monitor PD Responsivity	$r_{PD}$	$V_{RM}=5V$	10	-	200	$\mu A/mW$
Thermistor Resistance	$R_{TH}$	$T_{OP}=25\text{ }^\circ C$	9.5	10	10.5	KOhm
Thermistor Temp. Coefficient	$TC_{TH}$	$T_{OP}=25\text{ }^\circ C$	-	-4.4	-	%/°C
TEC Current	$I_{TEC}$	$-40 < T_C < +85\text{ }^\circ C$ , $I_F = 100\text{ mA}$	-1.5	-	1.6	A
Fiber Length	-	May include splice	1.0	1.5	-	m
Fiber Buffer	-	-	-	900	-	$\mu m$
Fiber Core / Cladding	-	-	-	9/125	-	$\mu m$

## RF Characteristic


Parameter	Symbol	Condition	Min	Typ	Max	Unit
Frequency Range	F	-	5	-	1200	MHz
Frequency Response	S21	$I_F = 60 \text{ mA}$ , 5 MHz-1200 MHz	-	-	$\pm 1.0$	dB
Carrier-to-Noise Ratio	CNR	-	51	-	-	dB
Comp. Second Order, 1616A	CSO	4, 6, 8 mW options $\geq 10 \text{ mW}$ options	55 57	- -	- -	dB dB
Composite Triple Beat, 1616A	CTB	-	65	-	-	dB
Relative Intensity Noise	RIN	-	-	$< -155$	-	dB/Hz

OMI = 3.2% for 110ch NTSC option

OMI = 3.7% for 79ch NTSC option

In order to prevent reflection-induced distortion, the laser must be connected to an optical cable having a return loss of at least 55 dB for discrete reflections and 30 dB for distributed reflections.

## Outline Drawing (Dimensions are in inches and mm)

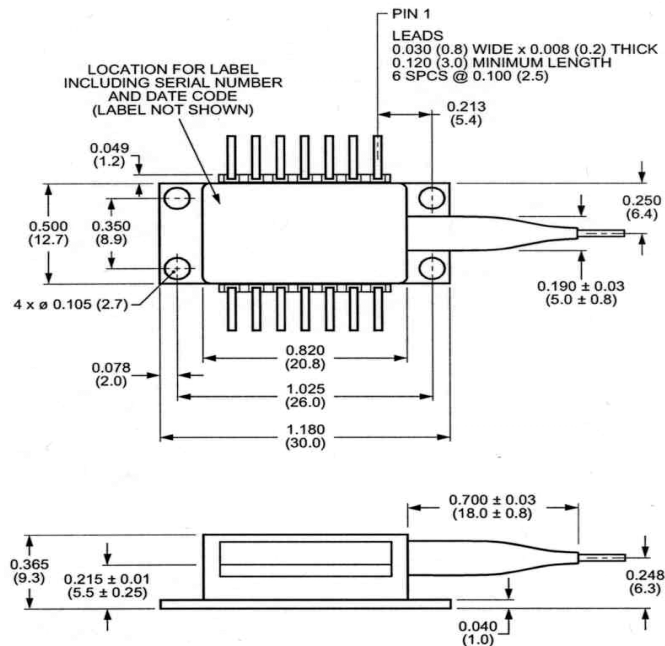

**Electrical Schematics**

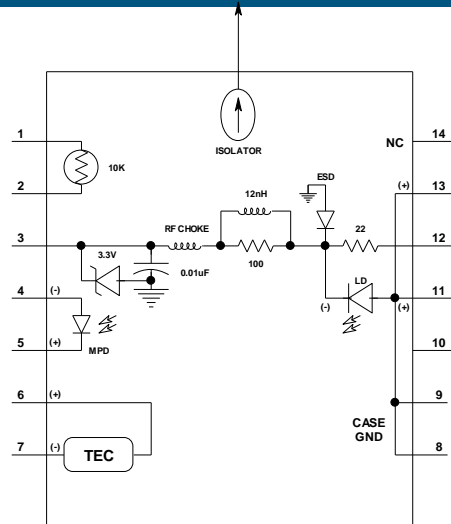


Figure 1. 1616A Laser Schematic

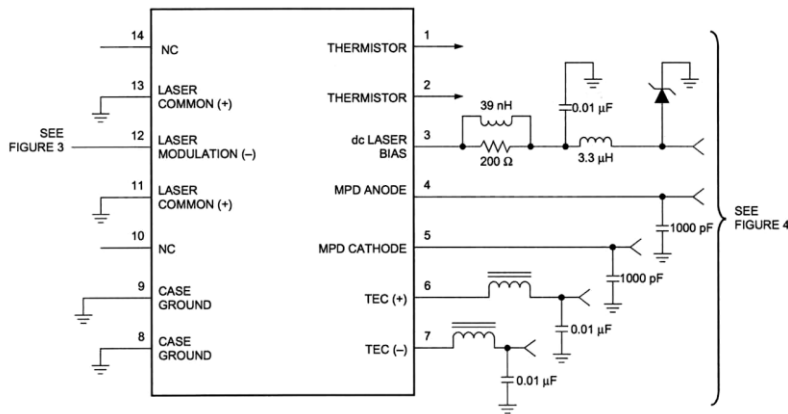



Figure 2. Suggested Matching Circuit for 1616A

**Pin Definitions**

Pin	Description
1	Thermistor
2	Thermistor
3	Dc Laser Bias (-)
4	MPD Anode (-)
5	MPD Cathode (+)
6	Thermal Electric Cooler (+)
7	Thermal Electric Cooler (-)
8	Case Ground
9	Case Ground
10	NC
11	Laser Common (+)
12	Laser Modulation (-)
13	Laser Common (+)

## Ordering Code Defintions

1616x – www – yy – zz

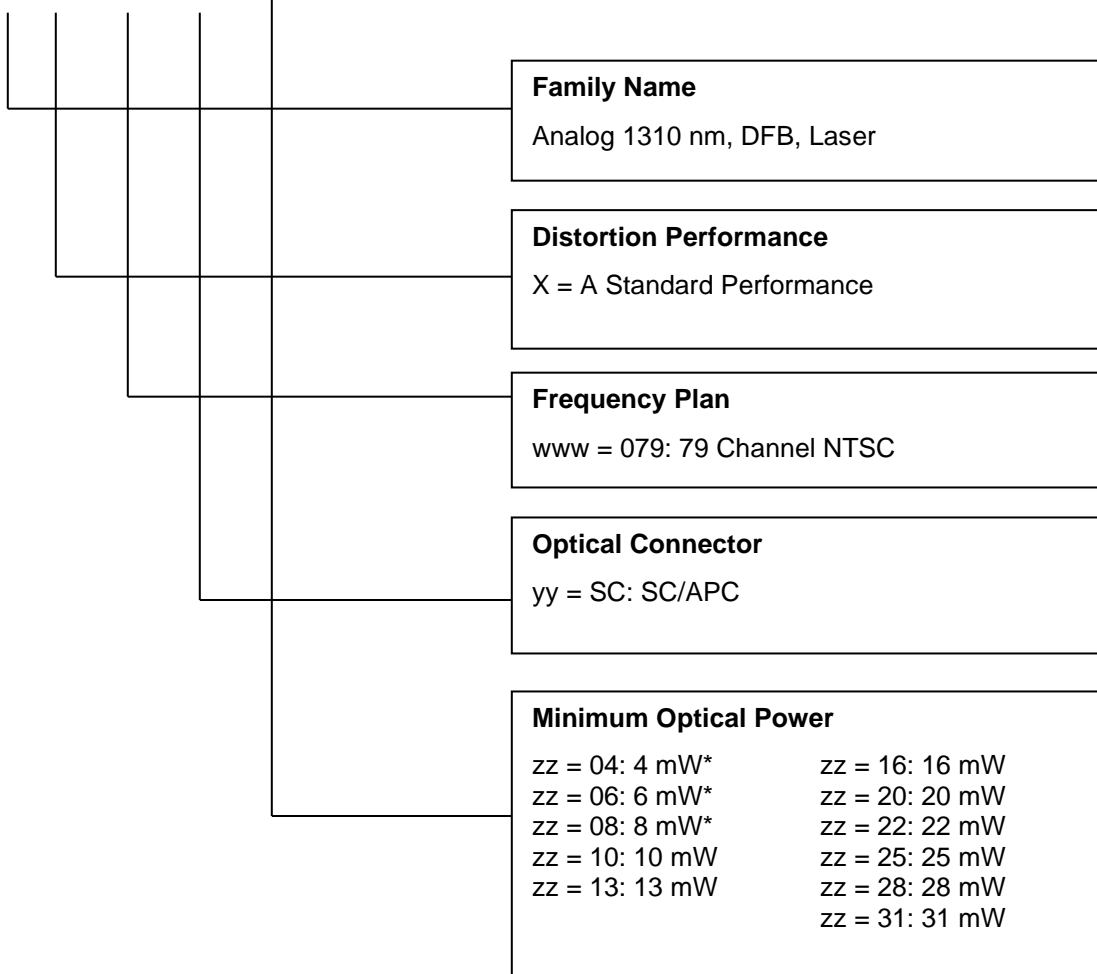

\*Note: Lossy splice may be applied for output power 4 mW to 8 mW.

## Laser Safety

This product meets the appropriate standard in Title 21 of the Code of Federal Regulations (CFR). FDA/CDRH Class 1 laser product. This device has been classified with the FDA/CDRH under accession number 0220191.

All Versions of this laser are Class 1 laser product, tested according to IEC 60825-1:2014/EN 60825-1:2014

Single-mode fiber pigtail with SC/APC connectors (standard).

Wavelength = 1.3  $\mu\text{m}$ .

Maximum power = 50 mW.

Because of size constraints, laser safety labeling (including an FDA class 1 label) is not affixed to the module, but attached to the outside of the shipping carton.

Product is not shipped with power supply.

**Caution: Use of controls, adjustments and procedures other than those specified herein may result in hazardous laser radiation exposure.**

